



**TOP VIEW**

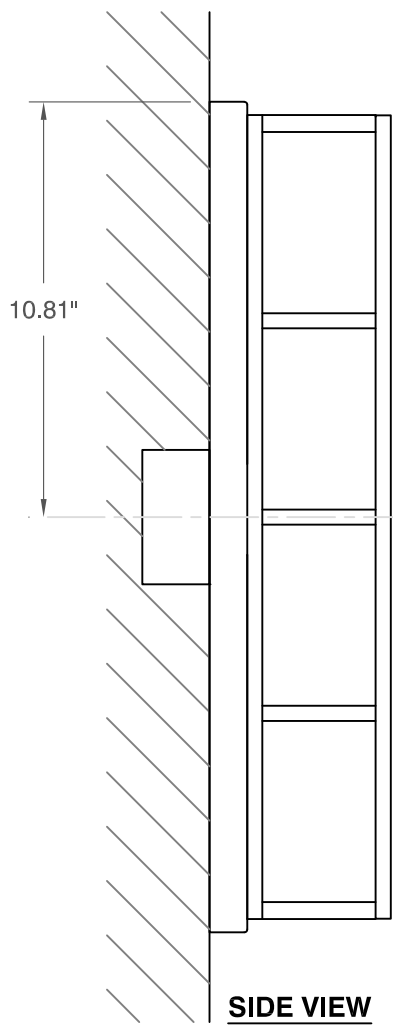

**SIDE VIEW**

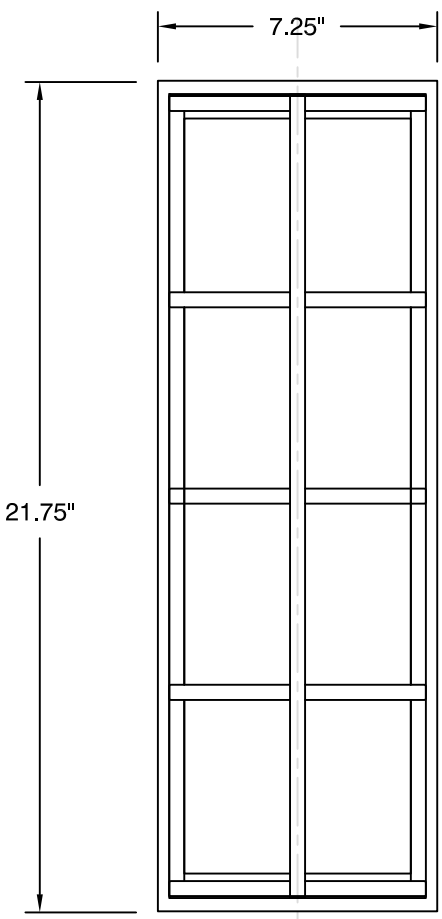

**FRONT VIEW**

**LEDA outdoor**  
 120v **3-713-224**  
 277v **37-713-224**

OXYGEN LIGHTING ©

**LAMPING**  
 o (2x) 10.1w LED Arrays  
 o 3000K, 350mA (ea.)  
 o Initial Lumens: 2920 lm  
 o Delivered Lumens: 733 lm  
 o CRI >80  
 o Color Consistency: 3 Step MacAdams Ellipse

**DRIVER (Dimmable)**  
 o (2x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

**METAL FINISHES**  
 (All finishes polyester powdercoat)  
 o **22** - Oiled Bronze  
 o **24** - Satin Nickel

**DIFFUSER**  
 o **2** - Matte White Acrylic

**INPUT VOLTAGE**  
 o 120v OR 277v 50/60Hz

**DIMENSIONS**  
 o 7.25" (w) x 21.75" (h)  
 4.75" (ext.)

**SPECIAL NOTE**  
 o Add caulking around fixture base at the wall to prevent water from entering fixture.

**INSTALLATION**  
 o 4" Octagonal J-Box  
 o ETL WET Listed (installer must provide a bead of caulk between fixture housing and mounting surface)  
 o Wall mount  
 o Conforms to UL STD 1598  
 o Certified CAN/CSA STD C22.2 No. 250.0



| Sample Catalog Number |          |        |                |
|-----------------------|----------|--------|----------------|
| Series #              | Diffuser | Finish | Catalog Number |
| 3-713                 | - 2      | 24     | = 3-713-224    |

**oxygen**

**OXYGEN LIGHTING**  
 201 RAILHEAD RD, FORT WORTH, TX 76106  
 TEL. (877) 607-0202 FAX (877) 607-0203  
 WWW.OXYGENLIGHTING.COM

PROJECT: \_\_\_\_\_  
 DATE: \_\_\_\_\_

