


SIDE VIEW

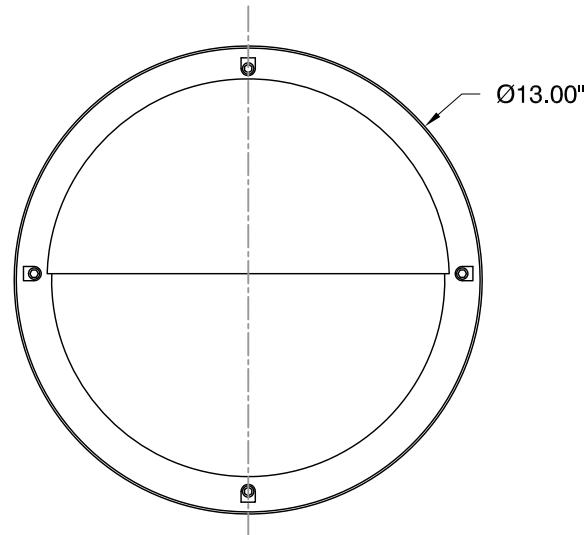

FRONT VIEW

ECLIPSE outdoor
 120v **3-714-6**
 277v **37-714-6**

OXYGEN LIGHTING ©

LAMPING

- o (1x) 10.1w Array
- o 3000K, 350mA
- o Initial Lumens: 1460 lm
- o Delivered Lumens: TBD
- o CRI > 80
- o Color Consistency: 3 step MacAdam Ellipse

DRIVER (Dimmable)

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

METAL FINISHES

(All finishes polyester powder coat)

- o 6 - White
- o 15 - Black
- o 16 - Gray

DIFFUSER

- o Injection Molded Matte White Polycarbonate

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DIMENSIONS

- o 13"(Ø) x 4.30" (ext)

SPECIAL NOTE

- o Add caulking around fixture base at the wall to prevent water from entering fixture.

INSTALLATION

- o 4" Octagonal J-Box
- o ETL WET Listed (installer must provide a bead of caulk between fixture housing and mounting surface)
- o Wall or ceiling mount
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0

Sample Catalog Number



| Series # | Finish | Catalog number |
|----------|--------|----------------|
| 3-714 | - 16 | = 3-714-16 |

oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____

DATE: _____

