



**TOP VIEW**

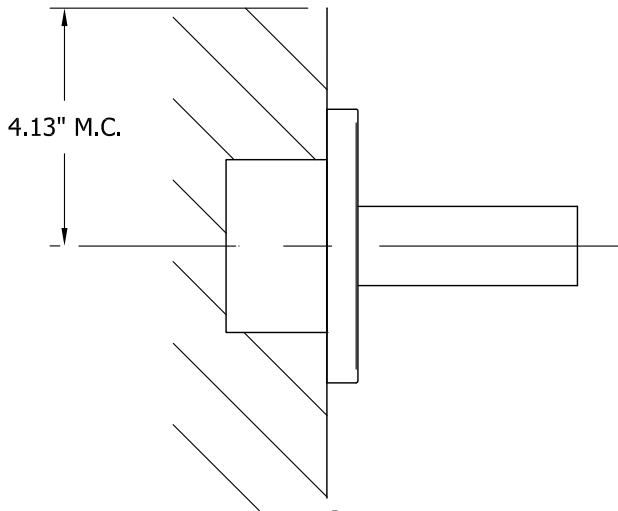

**SIDE VIEW**

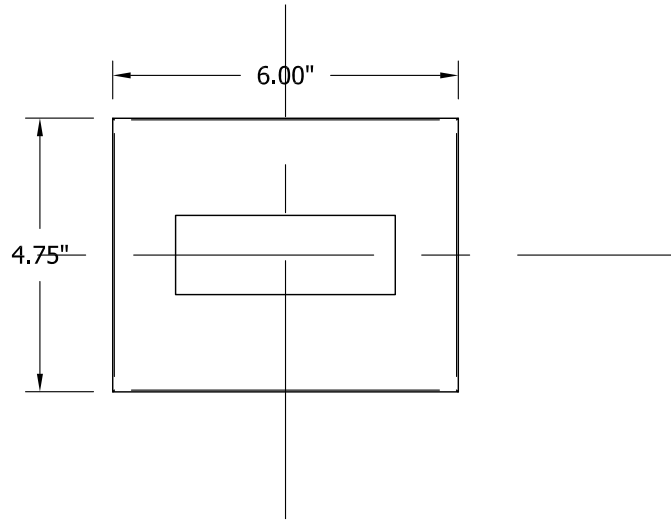

**FRONT VIEW**

**ERIS** outdoor  
 120v **3-720-22**  
 277v **37-720-22**

OXYGEN LIGHTING ©

**LAMPING**

- o (1x) 8.2w LED array
- o 3000K, 350mA
- o Initial Lumens: 1173 lm
- o Delivered Lumens: 496 lm
- o CRI > 80
- o 60000 Hr Life Span
- o Color Consistency: 3 Step MacAdam Ellipse

**DRIVER (Dimmable)**

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

**METAL FINISHES**

- (All finishes polyester powder coat)
- o 16 - Gray
  - o 22 - Oiled bronze

**DIFFUSER**

- o Clear frosted glass

**INPUT VOLTAGE**

- o 120v 50/60HZ
- o 277v 50/60HZ

**DIMENSIONS**

- o 6.00" (w) x 4.75" (h) x 4.35" (ext.)

**SPECIAL NOTE**

- o Add caulking around fixture base at the wall to prevent water from entering fixture.

**INSTALLATION**

- o 4" J-Box
- o 2.5" Deep Octagonal J-Box
- o ETL WET Listed (Installer must provide a bead of caulk between fixture housing and mounting surface)
- o Wall mount
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0

**Sample Catalog Number**

Series #	Finish	=	Catalog Number
3-720	16	=	3-720-16



**oxygen**

**OXYGEN LIGHTING**  
 201 RAILHEAD RD, FORT WORTH, TX 76106  
 TEL. (877) 607-0202 FAX (877) 607-0203  
 WWW.OXYGENLIGHTING.COM

PROJECT: \_\_\_\_\_  
 DATE: \_\_\_\_\_

